

IDEAL 0101 HDP

The ideal solution for making discarded hard drives from personal computers, notebooks, printers and copiers unusable

At the touch of a button, the IDEAL 0101 HDP punches a hole completely through the hard drive, rendering the stored data inaccessible. Suitable for 3.5" or 2.5" hard drives (single feeding). Adjustable feed chute constructed of high quality steel. Handy slide lever for easy selection of hard drive size (3.5" or 2.5"). Transparent safety flap on the feed chute made of unbreakable plastic. Punching die made from hardened, nickel-plated steel. Sturdy steel endplate. LEDs for illuminating the feed chute during the punching process. Slider mechanism for unloading punching compartment. Destroyed hard drives drop into a sturdy plastic bin inside the cabinet. High-quality wooden cabinet with front opening door. SPS (Safety Protection System) safety package: electronically controlled, hinged safety flap for the feed opening; EASY_SWITCH multifunction control element for start and stop indicates the operational status of the machine with varying colour codes and back-lit symbols; jam protection for punching die with automatic reverse; automatic stop after the punching process; weight sensor for automatic shut-off when the collection bin is full; electronic door protection via a magnetic proximity switch; double motor protection. Quiet and powerful 640 Watt single phase motor rated for continuous operation. Sturdy Twin Drive System with fully enclosed gear box housing. Mobile on castors. Power connection: 230 V / 50 Hz / 1~ (other voltages available). Dimensions (H x W x D): 850 x 495 x 470 mm, Weight: 63 kg

FOR HARD DRIVE SIZES

3,5" / 2,5" hard drives


Punching cycle 15 s



IDEAL

IDEAL 0101 HDP

Features

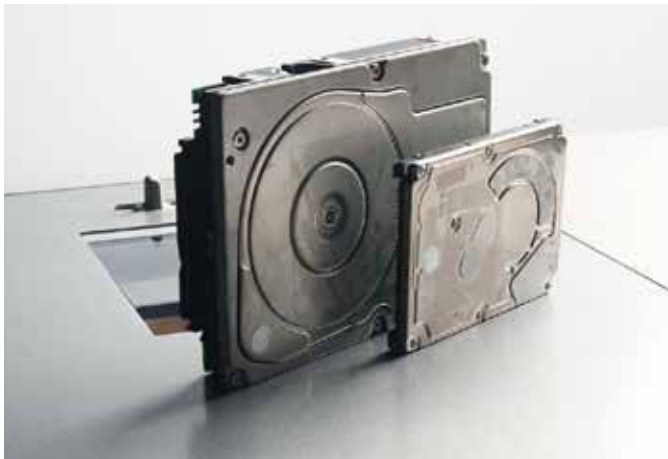

SUITABLE FOR 3.5" AND 2.5" HARD DRIVES The hard drive punch IDEAL 0101 HDP is designed for the two most common hard drive sizes.



FEEDING CHUTE WITH SAFETY FLAP The electronically controlled, transparent safety flap is an important part of the SPS (Safety Protection System) package. The punching die can only be activated if the safety flap is closed.



EASY_SWITCH FOR INTUITIVE OPERATION The intelligent multifunction control element indicates the operational status of the machine with colour codes and back-lit symbols for safe and easy operation.



PUNCHING DIE FROM HIGH GRADE TOOL-STEEL The high quality punching die is made of hardened, nickelplated tool steel. Durability is also guaranteed by a powerful single phase motor rated for continuous operation in combination with the sturdy "twin drive system".



The technical data are approximate. Subject to change. 04/2011

